

MODEL # VSCD-2-20-R-SQ-SC

SPECIFICATIONS

The Vienna Series VSCD is a slide-in cold display in our Vienna Snackty Cool Series. Designed to slide into a counter with front stainless steel panel exposed. This merchandiser includes a glass top easy change front glass for easy cleaning. It also features stainless steel exterior, top canopy light, (1) ambient glass shelf and sliding rear doors. Unique design includes a rear intergrated cold pan with slide out cutting board for compact spacing.

- Available lengths:** 28 1/2"
Available depths: 46 1/8"
Available heights: 55 1/8"



STANDARD FEATURES

OPTIONAL FEATURES

- Free Standing Cabinet Combination
- 304 Stainless Steel Exterior
- Tempered Top Glass
- Easy Change Open/Closed Front Glass
- Insulated Glass Side Panels
- Acrylic Glass Rear Sliding Doors
- Unique pivot system gives the option for self service or operator serve
- Top Canopy Light
- (1) Fixed Ambient Shelf with Light
- Energy Efficient LED Lighting
- Easy Removable Deck Pans for Cleaning
- Adjustable Deck Pans
- Programmable Digital Refrigeration Controller
- Self-Contained Refrigeration with built in exaporation system
- Rear cold pan with pull out cutting board
- Slide-In base with leveling foot
- Adjustable Fan Speed
- Rear Air Ventilation Kit
- Lift-Up Evaporator
- Easy Slide-Out Condensing Unit
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Environmentally Safe Refrigerant
- 5 Year Compressor Warranty

- 3" Casters (Slide-In Style Units)
- Powder Coat (Contact Factory)



Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No.120


NOTE:

THE VSHC IS DESIGNED FOR NSF TYPE I ROOM CONDITIONS OF 75°F/55%RH. ANY DEVIATION IN TEMPERATURE OR HUMIDITY MAY INCREASE CHANCE OF CONDENSATION

MODEL	L	D*	H	VOLT	AMP	PLUG	WT	REFRIG.
VSCD2-20-R-SQ-SC	28 1/2	46 1/8	55 1/8	115	6.7	5-15P	425	R448A

* Depth includes rear cutting board. Cutting board can be removed, to fit through entrance, and be reinstalled once in place.

MODEL # VSCD-2-20-R-SQ-SC

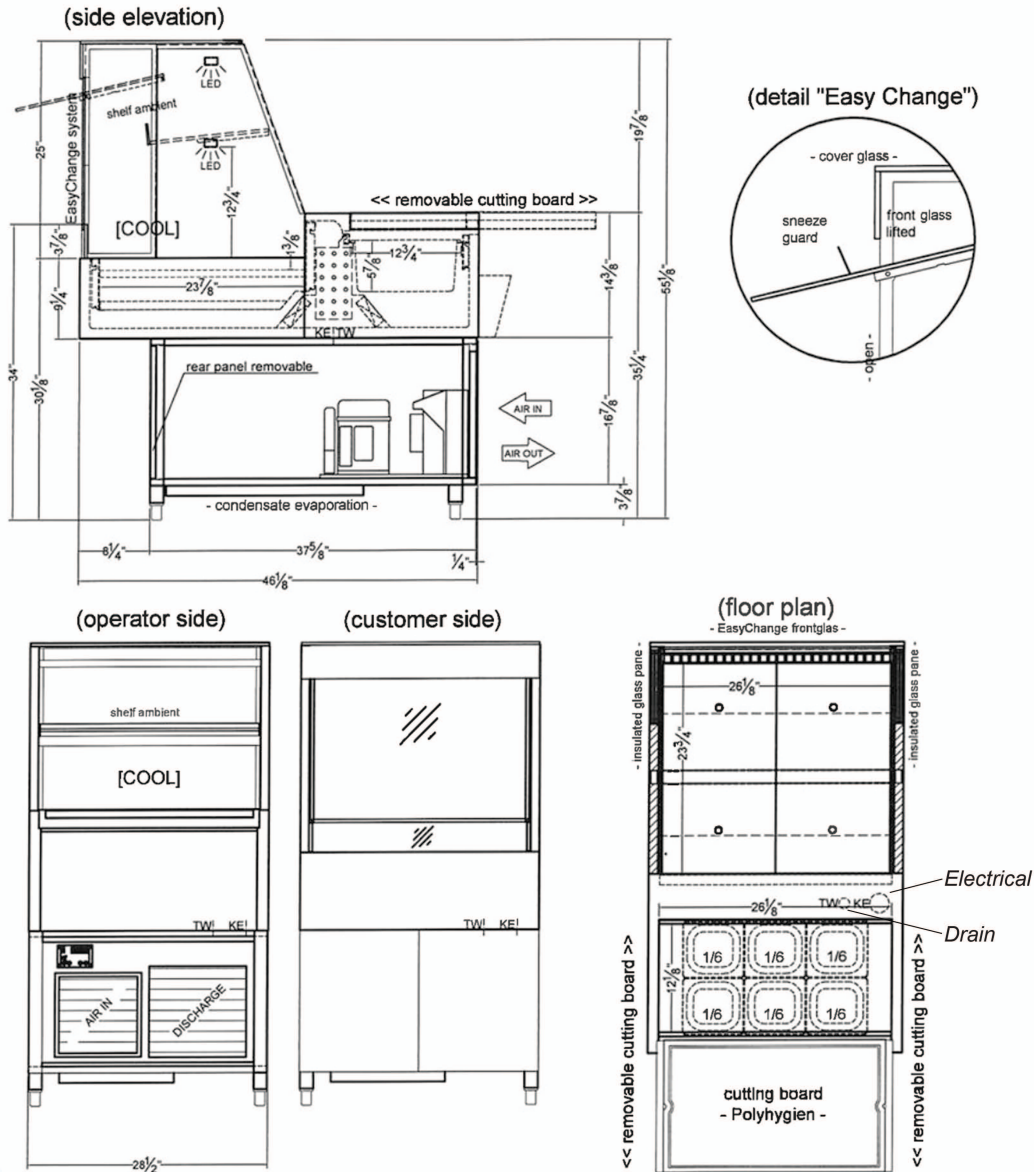

- Condensing unit easily slides out.
DO NOT BLOCK this area.
- Condensing unit requires adequate ventilation.

1. A 1" diameter drain is provided. The drain MUST be run to a floor drain AT TIME OF INSTALLATION.
2. RPI Merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 75 Degrees Fahrenheit and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet. Any adverse field conditions stated above will void warranty.

RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055